





LOW-DROP VOLTAGE REGULATOR

- $V_O = 5V \pm 4\%$ ($I_O = 5mA$)
- $I_{OS} \geq 500mA$
- $V_I - V_O \leq 0.6V$ ($I_O = 500mA$)
- V_I (surge) = $\pm 80V$
- THERMAL AND SHORT-CIRCUIT PROTECTION

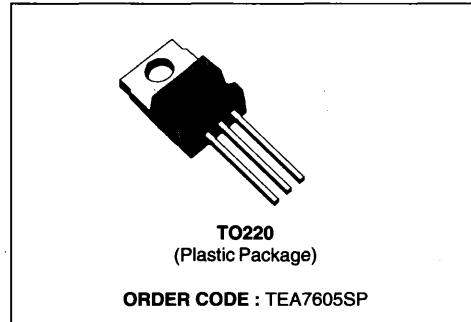

PIN CONNECTIONS

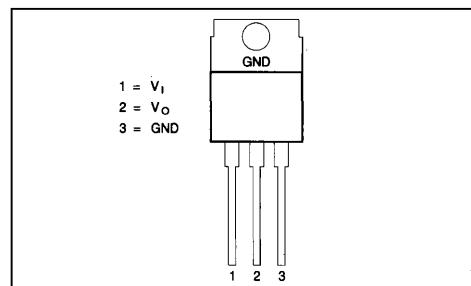

7605-01.EPS


DESCRIPTION

TEA7605 is a low-drop 5V regulator well suited to supplying stabilized voltage to μ Ps in harsh industrial environment.

Special care was taken to keep :

- Lowest possible quiescent current ($250\mu A$).
- Lowest possible output capacitor ($1\mu F$).

BLOCK DIAGRAM

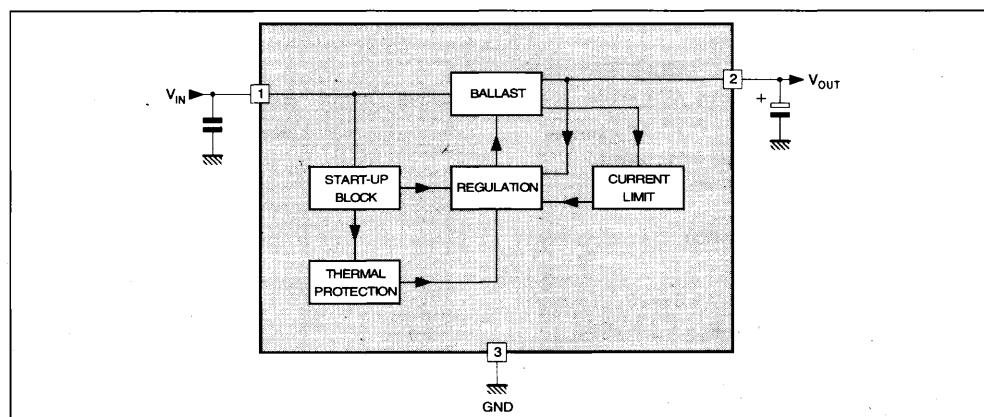

7605-02.EPS

ABSOLUTE MAXIMUM RATINGS

| Symbol | Parameter | Value | Unit |
|------------|--|------------|--------|
| V_I | Input Voltage - Continuous - $\tau = 300$ ms | 30 80 | V V |
| $V_{I(R)}$ | Reverse Input Voltage - Continuous - $\tau = 120$ ms | -18 -80 | V V |
| T_J | Operating Junction Temperature | -45, +150 | °C |
| T_{stg} | Storage Temperature | -55, +150 | °C |

7605-01-TBL

THERMAL DATA

| Symbol | Parameter | Value | Unit |
|---------------|-------------------------------------|---------|------|
| $R_{th(j-c)}$ | Junction-case Thermal Resistance | Max. 3 | °C/W |
| $R_{th(j-a)}$ | Junction-ambient Thermal Resistance | Max. 70 | °C/W |

7605-02-TBL

ELECTRICAL OPERATING CHARACTERISTICS $T_J = 25^\circ\text{C}$, $V_I = 14.4\text{V}$ (unless otherwise specified) Output Capacitor = $10\mu\text{F}$ (see note)

| Symbol | Parameter | Min. | Typ. | Max. | Unit |
|-------------|---|-------|------------------|------------------|----------------|
| V_O | Output Voltage ($I_O = 5$ to 500mA) | 4.875 | 5 | 5.125 | V |
| V_I | Input Supply Voltage (permanent) | | | 28 | V |
| I_{CC} | Current Consumption $I_O = 0\text{mA}$ $I_O = 150\text{mA}$ $I_O = 500\text{mA}$ | | 0.25 10 75 | 0.4 20 100 | mA mA mA |
| K_{VI} | Line Regulation ($V_I = 6$ to 26V ; $I_O = 5\text{mA}$) | | 5 | 10 | mV |
| K_{VO} | Load Regulation ($I_O = 5$ to 500mA) | | 40 | 60 | mV |
| $V_I - V_O$ | Drop-out Voltage $I_O = 150\text{mA}$ $I_O = 500\text{mA}$ | | 0.18 0.4 | 0.6 | V V |
| SVR | Supply Voltage Rejection ($I_O = 350\text{mA}$, $f = 120\text{Hz}$, $C_O = 1\mu\text{F}$, $V_I = 12 \pm 5\text{V}$) | | | 60 | dB |
| I_{SC} | Short-circuit Output Current | 0.5 | 0.7 | | A |

7605-03-TBL

NOTE : Applications Hints

The output capacitor has a direct influence on output voltage stability. A $10\mu\text{F}$ capacitor will provide satisfactory results. There is no upper limit on this capacitor value.

If necessary, this value can be reduced down to $1\mu\text{F}$; however, in such case, it should be checked that output capacitor keeps sufficiently high capacitance and low equivalent series resistance in the whole temperature range.


Such low capacitor value is not recommended either, if output current is to switch abruptly from very high to very low values (for instance, 400mA to $< 1\text{mA}$).

ELECTRICAL OPERATING CHARACTERISTICS $T_J = -45^\circ\text{C}$ to $+125^\circ\text{C}$, $V_I = 14.4\text{V}$ (unless otherwise specified) Output Capacitor = $10\mu\text{F}$

| Symbol | Parameter | Min. | Typ. | Max. | Unit |
|---------------------|---|--------------|------|-------------------|----------------|
| V_O | Output Voltage ($I_O = 5$ to 500mA) | 4.8 | 5 | 5.2 | V |
| $\frac{dV_O}{dT_I}$ | Output Voltage Drift $T_J = -45$ to $+25^\circ\text{C}$ $T_J = +25$ to $+125^\circ\text{C}$ | -0.4 -0.6 | | | mV/°C |
| I_{CC} | Current Consumption $I_O = 0\text{mA}$ $I_O = 150\text{mA}$ $I_O = 500\text{mA}$ | | | 0.45 25 120 | mA mA mA |
| K_{VI} | Line Regulation ($V_I = 6$ to 26V , $I_O = 5\text{mA}$) | | | 20 | mV |
| K_{VO} | Load Regulation ($I_O = 5$ to 500mA) | | | 80 | mV |
| $V_I - V_O$ | Drop-out Voltage $I_O = 150\text{mA}$ $I_O = 500\text{mA}$ | | 0.2 | 0.8 | V V |
| I_{SC} | Short-circuit Output Current | 0.4 | | | A |
| I_{OM} | Maximum Output Current | 0.5 | | | A |

7605-04-TBL

TYPICAL DIAGRAM

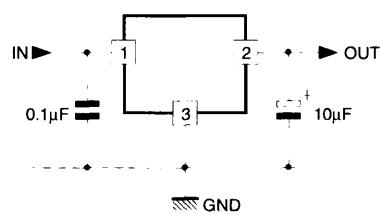

7605-03 EPS

