

**Silicon NPN Power Transistors**

**2SD1266 2SD1266A**

**DESCRIPTION**


- With TO-220Fa package
- High forward current transfer ratio  $h_{FE}$  which has satisfactory linearity
- Low collector saturation voltage
- Complement to type 2SB941/941A

**APPLICATIONS**

- For power amplification

**PINNING**

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

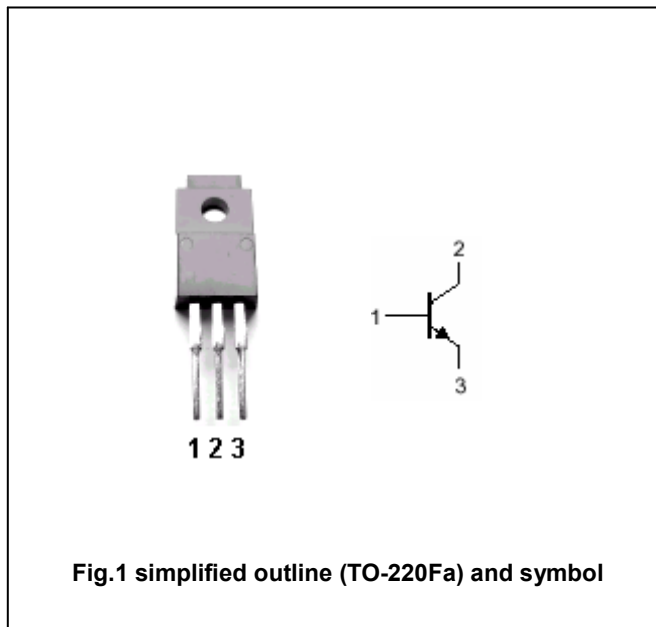

**Absolute maximum ratings(Ta=25°C)**

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V <sub>CBO</sub>	Collector-base voltage	2SD1266	60	V
		2SD1266A	80	
V <sub>CEO</sub>	Collector-emitter voltage	2SD1266	60	V
		2SD1266A	80	
V <sub>EBO</sub>	Emitter-base voltage	Open collector	6	V
I <sub>C</sub>	Collector current		3	A
I <sub>CM</sub>	Collector current-peak		5	A
P <sub>C</sub>	Collector power dissipation	T <sub>a</sub> =25°C	2	W
		T <sub>C</sub> =25°C	35	
T <sub>j</sub>	Junction temperature		150	°C
T <sub>stg</sub>	Storage temperature		-55~150	°C

## Silicon NPN Power Transistors

## 2SD1266 2SD1266A

## CHARACTERISTICS

T<sub>j</sub>=25°C unless otherwise specified

SYMBOL	PARAMETER		CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>CEO</sub>	Collector-emitter voltage	2SD1266	I <sub>C</sub> =30mA, I <sub>B</sub> =0	60			V
		2SD1266A		80			
V <sub>CEsat</sub>	Collector-emitter saturation voltage		I <sub>C</sub> =3A, I <sub>B</sub> =0.375A			1.2	V
V <sub>BE</sub>	Base-emitter voltage		I <sub>C</sub> =3A; V <sub>CE</sub> =4V			1.8	V
I <sub>EBO</sub>	Emitter cut-off current		V <sub>EB</sub> =6V; I <sub>C</sub> =0			1	mA
I <sub>CEO</sub>	Collector cut-off current	2SD1266	V <sub>CE</sub> =30V; I <sub>B</sub> =0			0.3	mA
		2SD1266A	V <sub>CE</sub> =60V; I <sub>B</sub> =0				
I <sub>CES</sub>	Collector cut-off current	2SD1266	V <sub>CE</sub> =60V; V <sub>BE</sub> =0			0.2	mA
		2SD1266A	V <sub>CE</sub> =80V; V <sub>BE</sub> =0				
h <sub>FE-1</sub>	DC current gain		I <sub>C</sub> =1A; V <sub>CE</sub> =4V	70		250	
h <sub>FE-2</sub>	DC current gain		I <sub>C</sub> =3A; V <sub>CE</sub> =4V	10			
f <sub>T</sub>	Transition frequency		I <sub>C</sub> =0.5A; V <sub>CE</sub> =10V, f=10MHz		30		MHz

## Switching times

t <sub>on</sub>	Turn-on time	I <sub>C</sub> =1A I <sub>B1</sub> =0.1A, I <sub>B2</sub> =-0.1A V <sub>CC</sub> =50V,		0.5		μs
t <sub>stg</sub>	Storage time			2.5		μs
t <sub>f</sub>	Fall time			0.4		μs

◆ h<sub>FE-1</sub> Classifications

Q	P
70-150	120-250



Silicon NPN Power Transistors

2SD1266 2SD1266A

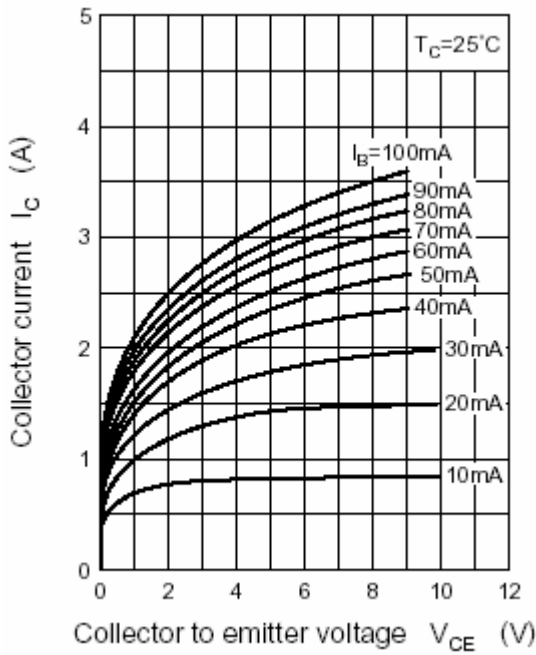


Fig.3 Static Characteristic

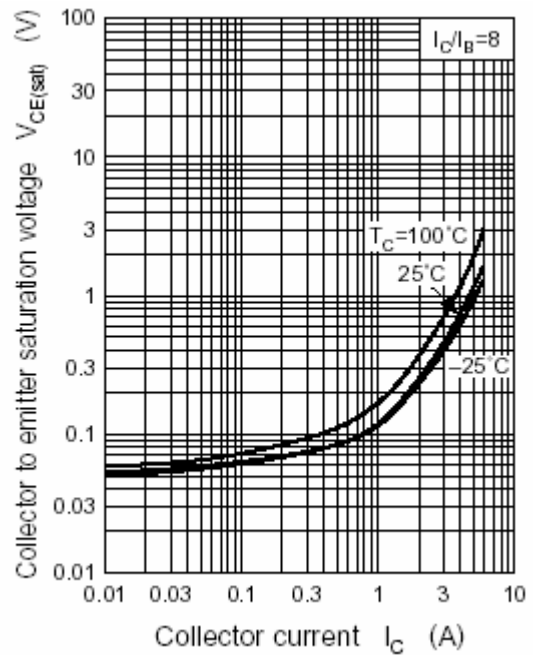


Fig.4 Collector-Emitter Saturation Voltage

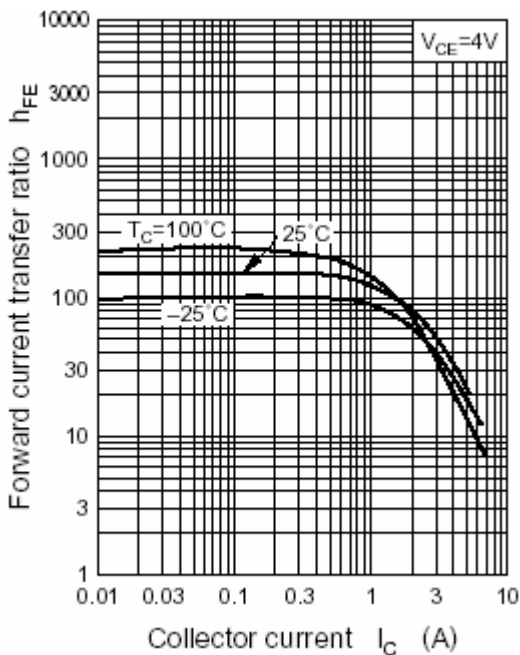


Fig.5 DC current Gain

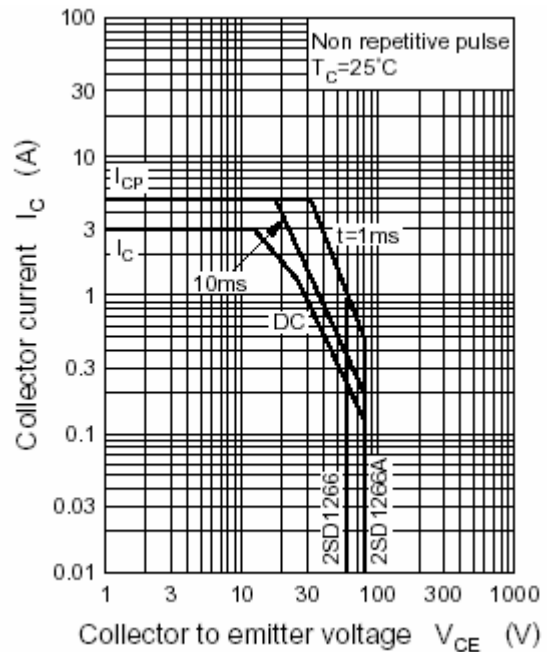


Fig.6 Safe Operating Area